

AN 10x50M22

TACTICAL BINOCULAR



Display

The AN 10x50M22 incorporates BAK-4 Porro prisms and multi-coated lenses, delivering impressive light transmission and resolution for brilliantly clear vision. Non-slip UV-resistant rubber armouring makes this unit comfortable to operate even in cold weather.

The AN 10x50M22 incorporates M22 reticles and is built to meet the needs of the most demanding professional operators. It is waterproof and shockproof and adheres to the latest military standards while remaining light and compact.

Optics	AN 10x50M22
Magnification (x)	10
Objective lens diameter (mm)	50
Focus range (m)	6 - ∞
Exit pupil (mm)	5
Eye relief (mm)	19
Field of view - Angular (°)	7
Apparent field of view (°)	70
Field of view @ 1,000y (feet)	368
Field of view @ 1,000m (metres)	123
Diopter adjustment range	±5
Twilight factor	22.4
Relative brightness	25
Transmission (%)	95
Lens & prism coating	FMC
Prism type	Porro
Prism glass material	BAK-4
Reticle type	M22
Mechanics, Electronics & Environmental	
Interpupillary distance (mm)	56-74
Weight (g)	1,309
Dimensions (mm)	180x190x73
Tripod mountable	Yes
Operating temperature range (°C)	-40 to +70
Storage temperature range (°C)	-45 to +75
Nitrogen purged	Yes
Waterproofing	MIL-STD-810G



AN 10x50M22

TACTICAL BINOCULAR



DELIVERY SET


Supplied with the following standard accessories:

- Soft case
- Neck strap
- Lens cover
- Lens cleaning cloth
- Operation manual

OPTIONAL ACCESSORIES



ATA - Tripod Adapter

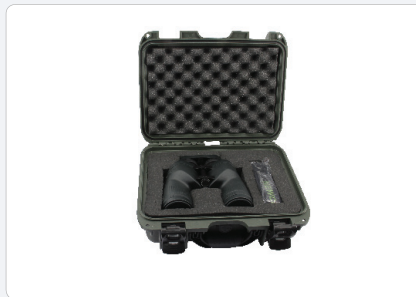

Hard Case

